



## Flex-o-Box

☐ IP65



### Approvals / Marking



### Features

#### Flex-o-Box Junior

**Technical data**

- Suitable for surface mounting
- 2.5 mm<sup>2</sup> - 500V
- IP65 protection degree
- Standards and approvals  
CEBEC: NBN C 68-685-2-0  
NBN C68-685-1  
VDE: 0606 Teil1  
KEMA: IEC 670
- Colour: RAL 7035
- Material: resists the 750°C incandescent wire test
- Halogen-free
- Operating temperature: -5°C to +60°C

**Eight flexible entries**

- 7 x Ø 20 in the side wall
- 1 x Ø 20 in the back
- Suitable for cable max. Ø 20
- Suitable for tubes 5/8" and 3/4"


#### Flex-o-Box JB<sup>6</sup>

**Technical data**

- Suitable for surface mounting
- 6 mm<sup>2</sup> - 500V
- IP65 protection degree
- Standards and approvals:  
CEBEC: NBN C68-685-2-0  
NBN C68-685-1  
VDE: 0606,  
KEMA: IEC 670
- Colour: RAL 7035
- Material: resists the 750°C incandescent wire test
- Halogen-free
- Operating temperature: -5°C to +60°C

**Nine flexible entries**

- 7 x PG16 in the side wall
- 2 x Ø 20 mm max. entries in the back of the base
- Suitable for cable max. Ø 20
- Suitable for tubes 5/8" and 3/4"
- Suitable for cable seals (8 mm min. thread length)

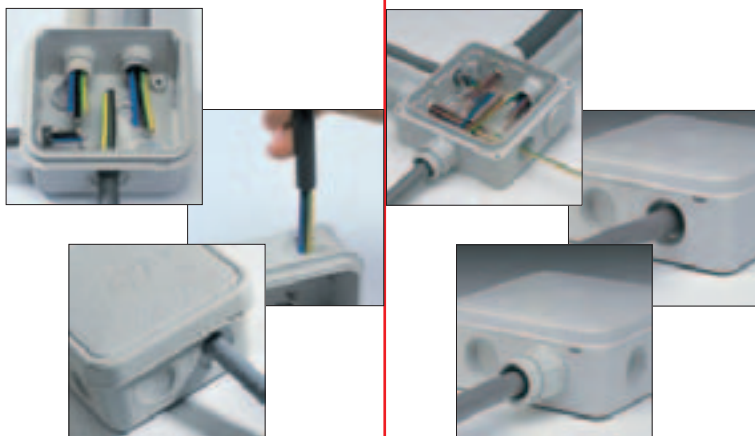

Dimensions ● pg F.35

## Flex-o-Box



Junior

Junction box 2,5 mm<sup>2</sup>

Cat. nr.

Ref. nr.

Pack.

L/030725-000

600656

10/100



JB<sup>6</sup>

Junction box 6 mm<sup>2</sup>

L/030700-000

600651

10/100

## Accessories



for Junior and JB<sup>6</sup>

### Terminal block

L/030493-058 600950 30

6 mm<sup>2</sup> - 500V - pin-type

5-terminal blocks

Possible connections per terminal:

6 x 1.5 mm<sup>2</sup> 2 x 6 mm<sup>2</sup>

4 x 2.5 mm<sup>2</sup> 2 x 10 mm<sup>2</sup>

3 x 4 mm<sup>2</sup>

only for JB<sup>6</sup>

### Cable seal

L/020322-060 851046 50

PG16 grey



### Terminal strip

F/039070-000 610383 1

6 mm<sup>2</sup> - 500V - hole-type

5-terminal strips

Possible connections per terminal:

6 x 1.5 mm<sup>2</sup> 3 x 4 mm<sup>2</sup>

4 x 2.5 mm<sup>2</sup> 2 x 6 mm<sup>2</sup>

### Entry socket

L/020415-004 600933 25/300

PG16 for tube 5/8" grey

L/020417-004 600934 25/300

PG16 for tube 5/8" grey



### Insulated cap

L/030229-004 600945 25

PG16 grey



### Screws

For cover fastening

L/030320-058 600952 40

Stainless steel

